

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/002617

International filing date: 28 January 2005 (28.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/540,612
Filing date: 30 January 2004 (30.01.2004)

Date of receipt at the International Bureau: 07 March 2005 (07.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1289347

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 25, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/540,612

FILING DATE: *January 30, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US05/02617*



Certified by

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Please type a plus sign (+) inside this box 

PTO/SB/16 (8-00)

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Stephan M.	Brandstadter	Indianapolis, IN			
Andrew	Jackson	West Lafayette, IN			
Gregory	Leman	West Lafayette, IN			
<input checked="" type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
Fluorine Functional Groups, Fluorine Compositions, Processes for Manufacturing Fluorine Compositions, and Material Treatments					
Direct all correspondence to:		CORRESPONDENCE ADDRESS			
<input checked="" type="checkbox"/> Customer Number		021567		<div style="border: 1px solid black; padding: 5px; text-align: center;">Place Customer Number Bar Code Label here</div>	
OR		Type Customer Number here			
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification		Number of Pages	37	<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s)		Number of Sheets	6	<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees				160.00	
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:		23-0925			
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

TYPED or PRINTED NAME Robert C. Hyta

TELEPHONE 509-624-4276

Date 01/30/04

REGISTRATION NO.
(if appropriate)
Docket Number:

46,791

PC3-046

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Label No. EL 979978869 US

EL 979978869

SECOND SHEET OF INVENTORS

Vimal Sharma West Lafayette, IN
E. Bradley Edwards Lafayette, IN

EL 979978869

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$160.00)

Complete if Known

Application Number	Filed Herewith
Filing Date	Filed Herewith
First Named Inventor	Stephan M. Brandstadter
Examiner Name	Unknown
Group / Art Unit	Unknown
Attorney Docket No.	PC3-046

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 23-0925

Deposit Account Name Wells, St. John, P.S.

☒ Charge Any Additional Fee Required Under 37 CFR §§ 1.16 and 1.17

2. ☒ Payment Enclosed:

☒ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	160.00

SUBTOTAL (1) (\$160.00)

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
20**			0
3**			0
Multiple Dependent			0

**for number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
103 18	203 9	Claims in excess of 20	
102 78	202 39	Independent claims in excess of 3	
104 260	204 130	Multiple dependent claim, if not paid	
109 78	209 39	** Reissue independent claims over original patent	
110 18	210 9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$0.00)

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	0.00
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	0.00
139 130	139 130	Non-English specification	0.00
147 2,520	147 2,520	For filing a request for reexamination	0.00
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	0.00
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	0.00
115 110	215 55	Extension for reply within first month	0.00
116 380	216 190	Extension for reply within second month	0.00
117 870	217 435	Extension for reply within third month	0.00
118 1,360	218 680	Extension for reply within fourth month	0.00
128 1,850	228 925	Extension for reply within fifth month	0.00
119 300	219 150	Notice of Appeal	0.00
120 300	220 150	Filing a brief in support of an appeal	0.00
121 260	221 130	Request for oral hearing	0.00
138 1,510	138 1,510	Petition to institute a public use proceeding	0.00
140 110	240 55	Petition to revive - unavoidable	0.00
141 1,210	241 605	Petition to revive - unintentional	0.00
142 1,210	242 605	Utility issue fee (or reissue)	0.00
143 430	243 215	Design issue fee	0.00
144 580	244 290	Plant issue fee	0.00
122 130	122 130	Petitions to the Commissioner	0.00
123 50	123 50	Petitions related to provisional applications	0.00
126 240	126 240	Submission of Information Disclosure Stmt	0.00
581 40	581 40	Recording each patent assignment per property (times number of properties)	0.00
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	0.00
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	0.00
Other fee (specify)			0.00
Other fee (specify)			0.00

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$0.00)

SUBMITTED BY

Name (Print/Type) Robert C. Hyatt

Registration No. (Attorney/Agent)

46,791

Complete (if applicable)

Telephone 509-624-4276

Signature

Date

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

EL 979978869

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PROVISIONAL PATENT APPLICATION

* * * * *

**FLUORINE FUNCTIONAL GROUPS, FLUORINE
COMPOSITIONS, PROCESSES FOR
MANUFACTURING FLUORINE COMPOSITIONS,
AND MATERIAL TREATMENTS**

* * * * *

INVENTORS:
Stephan M. Brandstadter
Andrew Jackson
Gregory Leman
Vimal Sharma
E. Bradley Edwards

ATTORNEY'S DOCKET NO. PC3-046

EL 979978869

Fluorine Functional Groups, Fluorine Compositions, Processes for
Manufacturing Fluorine Compositions, and Material Treatments

[0001] TECHNICAL FIELD

[0002] The present invention relates to the field of fluorine functional groups, fluorine compositions, processes for manufacturing fluorine compositions, and material treatments.

[0003] BACKGROUND OF THE INVENTION

[0004] Compositions such as surfactants, polymers, and urethanes have incorporated fluorinated functional groups. In certain instances these groups are incorporated to affect the performance of the composition when the composition is used as a treatment for materials and when the composition is used to enhance the performance of materials. For example, surfactants incorporating fluorinated functional groups can be used as fire extinguishants either alone or in formulations such as aqueous film forming foams (AFFF). Traditional fluorosurfactants such as perfluoro-octyl sulfonate (PFOS) have linear perfluorinated polar portions.

[0005] Polymers and or urethanes incorporating fluorinated functional groups have been used to treat materials. Exemplary fluorinated treatments include compositions such as Scotchguard®.

[0006] SUMMARY OF THE INVENTION

[0007] The present invention provides fluorine functional groups, fluorine compositions, processes for manufacturing fluorine compositions, and material treatments.

[0008] An embodiment of the present invention provides fluorinated compositions that include R_f groups. The R_f groups can have at least two terminal $-CF_3$ groups. In exemplary embodiments, at least half of the fluorine content of the R_f group is provided by terminal $-CF_3$ groups. An exemplary general structure for the R_f group includes $(CF_3)_n(CF)_{(3-n)}(CF_2)_m$, with n between 1 and 3 and m between 0 and 6.

[0009] R_f groups can be incorporated into compositions such as polymers, urethanes, acrylate polymers, acrylate monomers, glycols, phosphate esters, metal complexes, and fluorosurfactants.

[0010] R_f containing compositions can be used as disbursing agents, or to treat substrate materials such as textile fabric, textile yarns, leather, paper, plastic, sheeting, wood, ceramic clays, as well as articles of apparel, wallpaper, paper bags, cardboard boxes, porous earthenware, construction materials such as brick, stone, wood, concrete, ceramics, tile, glass, stucco, gypsum, drywall, particle board and chipboard, and substrates such as carpet, drapery, upholstery, automotive and awning fabrics, and rainwear.

[0011] BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Embodiments of the invention are described below with reference to the following accompanying drawings.

[0013] Fig. 1 is a general view of some compositions to which R_f groups of the present invention may be incorporated.

[0014] Fig. 2 is a reaction scheme of an embodiment of the present invention.

[0015] Fig. 3 is a reaction scheme of an embodiment of the present invention.

[0016] Fig. 4 is a reaction scheme of an embodiment of the present invention.

[0017] Fig. 5 is a reaction scheme of an embodiment of the present invention.

[0018] Fig. 6 is a reaction scheme of an embodiment of the present invention.

[0019] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] This disclosure of the invention is submitted in furtherance of the constitutional purposes of the U.S. Patent Laws "to promote the progress of science and useful arts" (Article 1, Section 8).

[0021] An embodiment of the present invention provides fluorinated compositions. These compositions include fluorinated functional groups. These fluorinated functional groups can be referred to as R_f . An aspect of the present invention provides R_f groups having at least two terminal $-CF_3$ groups. In an exemplary embodiment, at least half of the fluorine content of the R_f groups is provided by terminal $-CF_3$ groups. An exemplary general structure for the R_f group includes $(CF_3)_n(CF)_{(3-n)}(CF_2)_m$, with n being between 1 and 3 and m being between 0 and 6. Exemplary R_f groups can include functional groups such as halogens (e.g. iodine), mercaptan, thiocyanate, sulfonyl chloride, hydroxyl, acid, and acid halides. The R_f groups may also include multiple alkylene groups having a ratio of the alkylene groups to the $-CF_3$ groups of one to one or in other aspects of the present invention two to one. Exemplary alkylene groups include methylene groups ($-CH_2-$) and/or difluoroalkylene groups ($-CF_2-$).

[0022] Referring to Fig. 1, R_f groups can be incorporated into compositions such as polymers, urethanes, acrylics including acrylate monomers and

polymers, glycols, phosphate esters, metal complexes, poly anhydrides, poly-enes, and/or fluorosurfactants.









[0023] R_f containing compositions can be used as disbursing agents, or to treat substrate materials such as textile fabric, textile yarns, leather, paper, plastic, sheeting, wood, ceramic clays, as well as articles of apparel, wallpaper, paper bags, cardboard boxes, porous earthenware, construction materials such as brick, stone, wood, concrete, ceramics, tile, glass, stucco, gypsum, drywall, particle board and chipboard, and substrates such as carpet, drapery, upholstery, automotive and awning fabrics, and rainwear.


[0024] R_f groups can be incorporated into compositions via R_f intermediates. Exemplary R_f intermediates include a functional portion that allows for incorporation into exemplary compositions such as fluorosurfactants, metal complexes, phosphate esters, glycols, acrylics, urethanes, polymers, poly-anhydrides, and telomer-based compositions.

[0025] Exemplary R_f groups, R_f intermediates and compositions are described with reference to Figures 1-7. Referring to Fig. 1, a schematic view of exemplary compositions employing the R_f groups of the present invention is shown. These compositions include but are not limited to surfactants, poly-anhydrides, acrylics, urethanes, metal complexes, poly-enes, and/or phosphate esters. In exemplary implementations these compositions can demonstrate desirable surface energies. Exemplary


compositions having the R_f groups of the present invention can affect the surface tension of solutions in which they are incorporated and/or the water resistance of materials to which they are applied.

[0026] Exemplary R_f intermediates include but are not limited to the following:

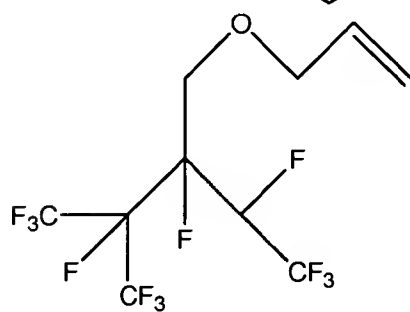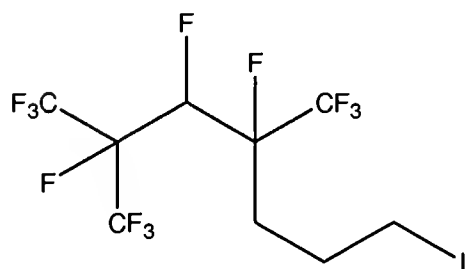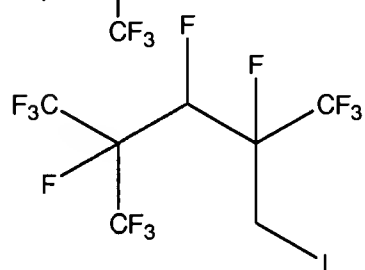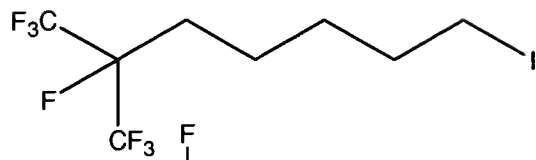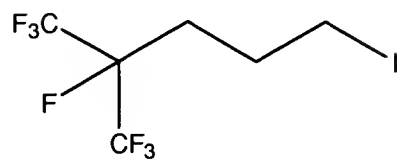



[0027] The R_f intermediate (4-iodo-2-(trifluoromethyl)-1,1,1,2-tetrafluorobutane) may be obtained for example at Matrix Scientific, P.O. Box 25067, Columbia, SC 92994-5067.



[0028] The R_f intermediate (1,1,1-trifluoro-2-trifluoromethyl-2,4-pentadiene) can be prepared in an exemplary aspect according to J. Org. Chem., Vol. 35, No. 6, 1970, pp. 2096-2099 herein incorporated by reference. 1,1,1-trifluoro-2-trifluoromethyl-2,4-pentadiene can also be prepared according to the following example.


[0029] **Exemplary preparation of 1,1,1-trifluoro-2-trifluoromethyl-2,4-pentadiene.**

[0030] Pentane (300cc) is placed in a 500cc three neck flask. The pentane is chilled below -30°C . To the pentane is added hexafluoroacetone (59g, 0.36mol), propylene (16.2g; 0.38mol.), and anhydrous aluminum trichloride (0.77g, 0.006mol). This solution is stirred and the temperature is allowed to warm to room temperature over 3 hour period.

[0031] A 15% aqueous HCl solution (20 mls) is added to the mixture and the mixture is washed 3 times with H_2O . The aqueous layer is decanted off

and the organic layer is dried with MgSO_4 . Remaining pentane and propylene are flashed vaporized off at 60°C to give 54.4 grams (70% by Gas Chromatography) of isomeric 1,1-bis(trifluoromethyl)-3-penten-1-ol.

[0032] The crude 1,1-bis(trifluoromethyl)-3-penten-1-ol (54 grams) is placed in a 250ml 3-neck flask. To this is added 125ml of conc. H_2SO_4 . The stirred solution is heated slowly to 95°C (the lights are boiled off between 34 and 55°C). The product 1,1,1-trifluoro-2-trifluoromethyl-2,4-pentadiene (15.6g, 45.5% yield) is taken off between 70 and 74°C . A process scheme for the preparation of 1,1,1-trifluoro-2-trifluoromethyl-2,4-pentadiene is shown below as exemplary reaction sequence(1).

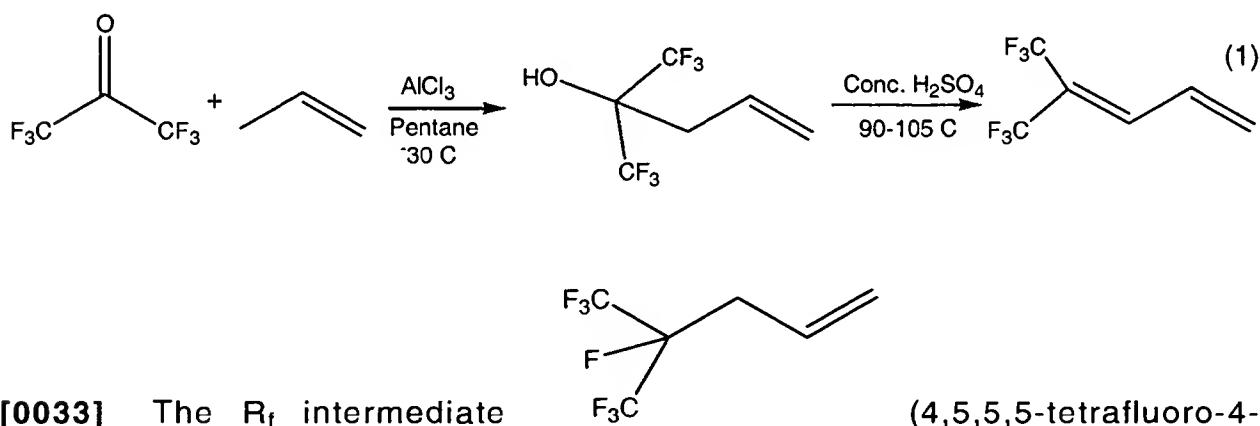

[0033] The R_f intermediate (4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene) can be prepared in an exemplary aspect according to Synthesis and characterization of a new class of perfluorinated alkanes: tetrakis(perfluoroalkyl) alkane. G. Gambaretto et al., Journal of Fluorine Chemistry, 5892 (2003) pgs 1-7 and United States Patent 3,843,735 to Knell et al both of which are herein incorporated by reference. 4,5,5,5-

tetrafluoro-4-(trifluoromethyl)pent-1-ene can also be prepared according to the following example.



**[0034] Exemplary preparation of
4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene.**

[0035] 1,1,1,2,3,3,3-heptafluoro-2-iodopropane (1651g, 5.6mol) AIBN (9.2g, 0.06mol), and 293g of 30% aqueous $\text{Na}_2\text{S}_2\text{O}_5$ are placed into a 2L pressure reactor. The reactor is sealed and heated to 80°C under autogeneous pressure. Allyl acetate (587g, 5.9mol) is slowly added to this mixture and the mixture is stirred for an additional 4 hours.

[0036] After stirring the organic layer is removed, washed twice with H_2O and dried with MgSO_4 to give 2212g of 4,5,5,5-tetrafluoro-4-(trifluoromethyl)-2-iodopentyl acetate (94%).

[0037] Diethylene glycol (2944g) and zinc powder (1330g) are placed into a 5L 5-neck flask equipped with a simple distillation apparatus. This mixture is stirred and heated to 120°C and the 4,5,5,5-tetrafluoro-4-(trifluoromethyl)-2-iodopentyl acetate (4149g) is slowly added. As the 4,5,5,5-tetrafluoro-4-(trifluoromethyl)-2-iodopentyl acetate is added, 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene (2075g, 97.8% assay by gc) is flashed-off and collected in a 1L ice trap. The content of the ice trap is distilled to give 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene >99.5% (b.p. 54°C). A

process scheme for the preparation of 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene is shown below as exemplary reaction sequence (2) and (3).

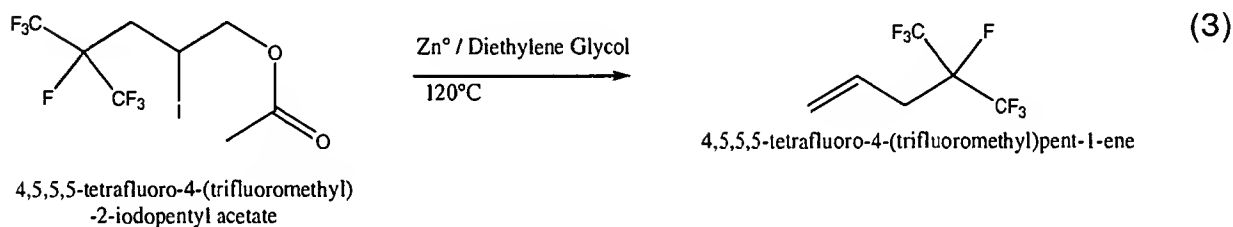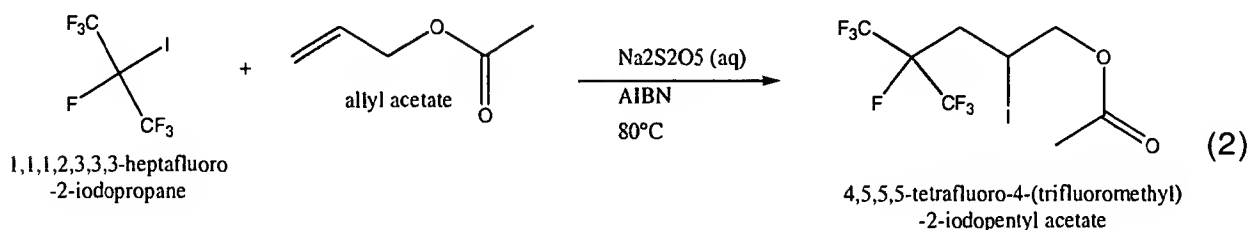


[0038] Gas Chromatography, Gas Chromatography/Mass Spectrometry and H^1 NMR is utilized to determine 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene as shown below.

Gas Chromatography of 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene				
Compound	Dbwax® (min)	Area %	Silicaplot® (min)	Area %
F7I	2.7, 3.6	0.8, 99.2		
allylOAc	13.1	99.9		
Iodoacetate	24.5	95+	N/A	
perfluoroisopropyl-1-propene	3.1	97.8+	23.4	99+


Gas Chromatography / Mass Spec of 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene		
Compound	SilicaPlot (min)	m/z
F7I	12.5 – 13.6	295-300
perfluoroisopropyl- 1-propene	14.9	210

[0039] NMR H^1 Chemical Shifts (ppm) of 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene.

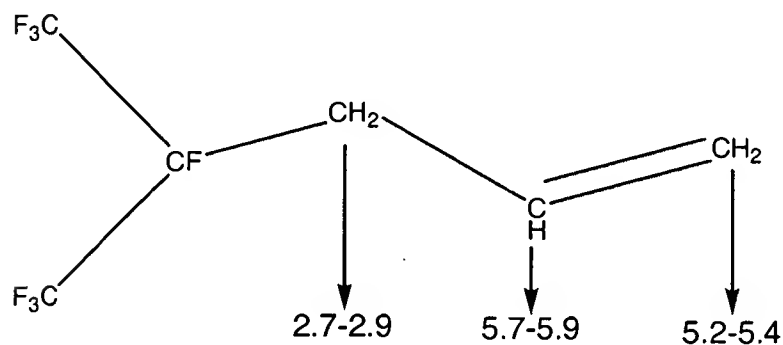

[0040] The R_f intermediate


(2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl) Pentyl allyl ether) can be

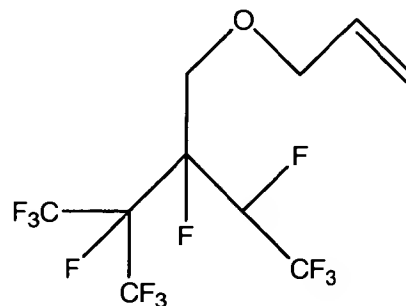

prepared in an exemplary aspect according to the following exemplary method.

[0041] Exemplary Preparation of 2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl)

[0042] 2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl) pentanol (551g, 1.66 moles) (exemplary procedures for the preparation of which are disclosed in US 3,467,247, herein incorporated by reference), allyl bromide (221.2g, 1.83 moles) and tetrabutylammonium hydrogen sulfate (5%) are placed into a 1L three-neck flask. This mixture is chilled to 10°C and 50% KOH (400g) is added over a 2 hour period. This solution is allowed to stir at 10°C for 72 hours. After the 72 hours an additional 100ml of 33% KOH is added and the mixture is allowed to stir for an additional 12 hours. The reaction is monitored by gas chromatography and after the reaction of 2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl) pentanol the mixture is washed 1 x H₂O, 2 x 10% HCl and 1 x H₂O. The organic layer is dried with MgSO₄ to give 516 g of material containing 20.04 and 28.21% (by gas chromatography and gas chromatography/mass spectrometry) 2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl) pentyl allyl ether. A process scheme for the preparation of 2,3,4,5,5,5-hexafluoro-2,4-bis(trifluoromethyl) pentyl allyl ether is shown below as exemplary reaction sequence (4).

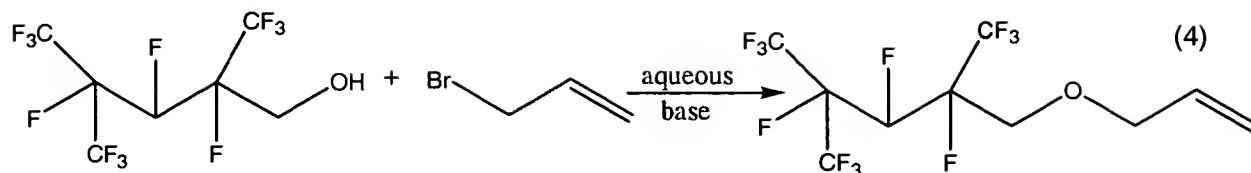

[0043] Iodide R_I intermediates can be converted to thiocyanate R_I intermediates ($R_I\text{SCN}$) by reacting the iodide intermediate with potassium thiocyanate as shown below as exemplary reaction sequence (5) and described as follows:



[0045] The reaction is carried out in absolute ethanol using acetic acid as a catalyst. A 30% molar excess of KSCN as compared to $R_I\text{I}$ is used. The ethanol, acetic acid, $R_I\text{I}$, and KSCN are charged to a reaction vessel, heated to reflux and held there until the reaction is complete. The reaction progress is monitored by analyzing the reaction mixture for $R_I\text{I}$ by gas chromatography. Upon reaction completion, the KI is filtered off the reaction mixture, the ethanol is evaporated away and the $R_I\text{I}$ is washed twice with hot (70 °C) water.

[0046] A mercaptan R_I intermediate may also be produced by reacting the iodine R_I intermediate with thiourea to make the isothiuronium salt and treating the isothiuronium salt with sodium hydroxide to give the mercaptan

R_f intermediate plus sodium iodide, as described in U.S. patent 3,544,663 herein incorporated by reference.

[0047] An embodiment of the present invention provides fluorosurfactants that include the R_f groups described above. Exemplary surfactants include those compounds having a polar portion attached to a non-polar portion. The polar portion can be referred to as the tail of the surfactant and the non-polar portion can be referred to as the head of the surfactant. Fluorosurfactants (R_f-R_s) include those surfactants having tail or polar portions containing fluorine. The fluorosurfactant tail or polar portion can be referred to as an R_f portion and the fluorosurfactant head or non-polar portion can be referred to as an R_s portion.

[0048] Aspects of the present invention provide fluorosurfactant production methods as well as fluorosurfactant intermediates and methods of manufacturing fluorosurfactant intermediates. An exemplary fluorosurfactant production method includes providing a fluorosurfactant intermediate having at least two -CF₃ groups. Exemplary fluorosurfactant intermediates include fluorocarbons having a beta end and an alpha end with the alpha end being designated for later attachment to the R_s portion of the fluorosurfactant. Exemplary methods for preparing surfactants can be found in German Offen. 1,924,264 and U.S. Patent 3,721,706 both of which are hereby incorporated by reference. Exemplary methods for preparing fluorosurfactants that include the R_f groups of the present invention are described below.

[0049] The thiocyanate R_f intermediate can be wet chlorinated to give the sulfonylchloride of the fluorosurfactant intermediate as shown below in exemplary reaction sequence (6).



[0050] The R_fSCN , water and acetic acid as a solvent are charged to a reaction vessel. Chlorine is added to the reaction vessel in 30 minute increments while the reaction vessel temperature is maintained at 20 °C to 30 °C. At the end of each 30 minutes of chlorine addition, 0.314 grams of water is added to the reaction vessel. For each gram of chlorine that is added, 4.5 moles per mole of R_fSCN is added. When this amount has been added, the reaction mixture is sampled and analyzed for R_fSCN by gas chromatography. When the reaction is complete, the reaction mixture is diluted to 65% R_fSO_2Cl with chloroform, heated to 40 °C and washed with twice its volume of 40 °C water. After the wash, the mixture is dried by azeotroping the water out using a Dean Stark trap. Karl Fischer titration is used to determine water amount. Water content can be less than 0.1%. The sulfonylchloride intermediate can then be esterified with a dimethylaminopropylamine ($H_2N(CH_2)_3N(CH_3)_2$, DMAPA) to yield a sulfonamidoamine as shown as exemplary reaction sequence (7) and described below.



[0051] The reaction is carried out in chloroform solution at reflux. It is preferred that the solvent and reactants in this step be as dry as possible, at least less than 0.1% by weight water. The DMAPA is dissolved in 1.5 times its volume in chloroform in the reaction flask which is immersed in a cooling bath. A DMAPA molar equivalent of 65% R_fSO_2Cl in chloroform solution is added to the reaction flask while maintaining the temperature of the reaction flask at less than 50 °C. When the addition is complete the temperature is raised to reflux and held at reflux for 5 hours. The reaction flask is then cooled to 60 °C and washed 3 times with equal volumes of 60 °C water. The chloroform is stripped under vacuum and the neat product is washed twice with 90 °C water. The reaction mix is sampled and analyzed for free DMAPA using a wet chemistry method that is specific for primary amines. The sulfonamidoamine can then be betainized with an acetate such as sodium monochloroacetate to yield the amphoteric fluorosurfactant $R_fSO_2NH(CH_2)_3N^+(CH_3)_2$ as shown as exemplary reaction sequence (8) and described below.








[0052] The sulfonamide is dissolved in enough absolute ethanol to give a 40% solution. An equimolar amount of sodium monochloroacetate is added. The mixture is refluxed for 8 hours. It is sampled and titrated for OH^- . If OH^- is greater than 1.5×10^{-3} eq., the solution is refluxed for an additional hour and reanalyzed. This sequence is repeated until OH^- is less than

1.5×10^{-3} eq. If there is no decline in OH^- in two succeeding samplings, additional sodium monochloracetate is added, the amount being calculated as the amount needed to lower the OH^- to a value below 1.5×10^{-3} eq. The by-product NaCl is filtered off and water is then added according to the following calculation.


[0053] In an exemplary aspect of the present invention, the mercaptan R_f intermediate may be attached to an R_s portion such as group 2-acrylamido-2-methyl-1 propane sulfonic acid available from Lubrizol as AMPS 2403 as generally described in U.S. patent 4,000,188 herein incorporated by reference.

[0054] An exemplary method for manufacturing an aminoxide of the fluorosurfactant can include the processes as generally described in U.S. patent 4,983,769 herein incorporated by reference. Accordingly, the sulfoamidoamine is combined with ethanol and water and 70% hydrogen peroxide and heated to at least 35°C for 24 hours. Activated carbon is then added and the mixture refluxed for about 2 hours. The reaction mixture is filtered and the filtrate evaporated to dryness to provide the aminoxide of the fluorosurfactant.


[0055] Exemplary fluorosurfactants that may be produced in accordance with the methods described herein include the following:

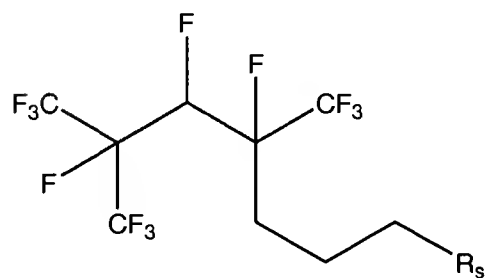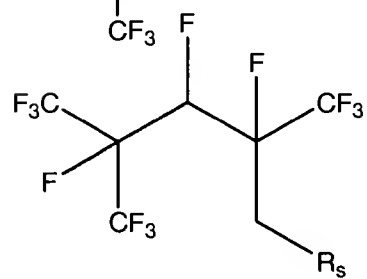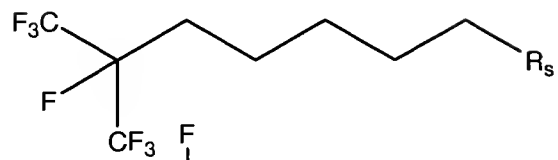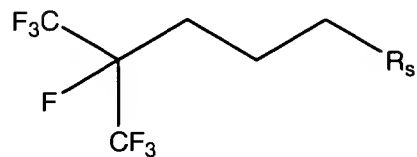

[0056] Exemplary R_s portions of the fluorosurfactants include the following:

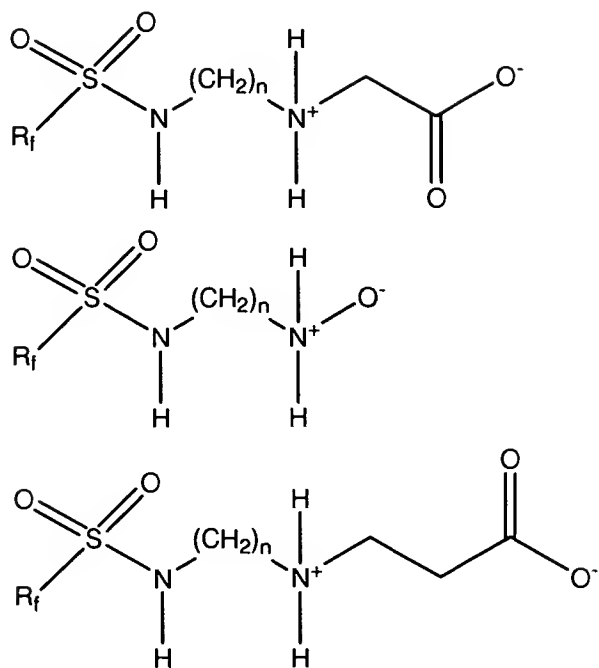


[0057] Exemplary fluorosurfactants include but are not limited to the following.

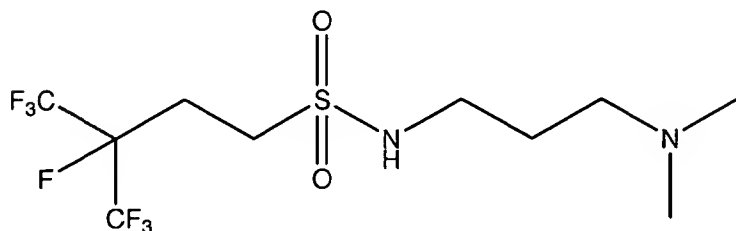

[0058] NMR: ^1H (D6-DMSO, 300 MHz) δ 1.6 (m, 2H), 2.1 (bs, 6H), 2.2 (m, 2H), 2.6 (m, 2H), 2.8 (m, 2H), 3.2 (m, 2H), 7.4 (bs, 1H); ^{13}C (D6-DMSO, 75 MHz) δ 22.9, 23.2, 27.5, 43.0, 45.0, 89-93 (ds), 114-126 (qd); and ^{19}F (CFCl_3 , D6-DMSO, 282 MHz) δ -76.6 (bs, 6F), -183.6 (m, 1F)

[0059] IR: (KBr, cm⁻¹) 3200 br w, 3100 m, 2900 m, 2800 m, 1469 s, 1315 s, 1221 s, 1160 s, 1142 m, 1083 m, 1045 m, 977, 818, 765, 713, 559 m.

[0060] and

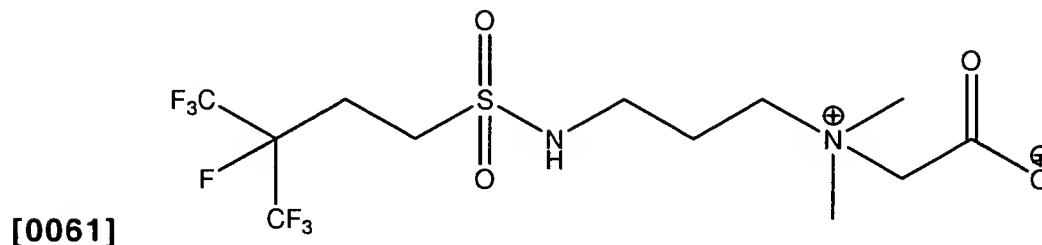

[0062] NMR: ¹H (D6-DMSO, 300 MHz) δ 1.8 (m, 2H), 2.6 (m, 2H), 3.0 (m, 2H), 3.1 (bs, 6H), 3.6 (m, 2H), 3.9 (m, 4H), 7.9 (bs, 1H); ¹³C (D6-DMSO, 75 MHz) δ 22.6, 22.9, 23.1, 43.1, 50.0, 60.8, 64.4, 88-93 (ds), 114.5-126.5 (qd); and ¹⁹F (CFCl₃, D6-DMSO, 282 MHz) δ -76.4 (d, 6.95 Hz, 6F), -183.4 (m, 1F)

[0063] The fluorosurfactants of the present invention may be used as relatively pure solutions or as mixtures with other components. An exemplary fluorosurfactant use includes use in fire-fighting foams such as aqueous film forming foams (AFFF).

[0064] An embodiment of the present invention provides metal complexes incorporating the R_f groups of the present invention. The R_f groups of the present invention can be incorporated as acid halides or carboxylic acids

(together being referred to as R_f acid) with the acid halide including, but not limited to, acid fluorides. An exemplary method for preparing the acid R_f intermediate includes reacting the iodine R_f intermediate disclosed above with fuming sulfuric acid to produce an acid fluoride R_f intermediate. Referring to Fig. 2, a reaction sequence 10 for the conversion of acid fluoride R_f intermediate 12 into a metal (chrome) complex 20 is shown. An acid fluoride R_f intermediate 12 can be reacted with an amino acid such as glycine 14 to produce an amine ester 16. Amine ester 16 may then be reacted with chromic chloride 18 in an alcohol such as methanol or isopropanol to produce an exemplary R_f chrome complex 20. Exemplary acid R_f intermediates include ethylene carboxylic acid R_f intermediates and/or mixtures of ethylene carboxylic acid R_f intermediates and carboxylic acid R_f intermediates. Exemplary preparations can be performed in accordance with U.S. Patents 3,351,643, 3,574,518, 3,907,576, 6,525,127, and 6,294,107, herein incorporated by reference. R_f chrome complexes 20 can then be used to treat substrates such as paper, leather, textiles, yarns, fabrics, glass, ceramic products, and/or metals. In some cases treating substrates with the complexes of the present invention render the substrates less permeable to water and/or oil.

[0065] An embodiment of the present invention also provides for incorporation of the R_f groups into phosphate esters which, in exemplary embodiments, can be used to treat substrates and/or be used as a disbursing agents during the preparation of polymers. Referring to Fig. 3, a

reaction sequence 30 is shown for the preparation of phosphate esters 34 from a hydroxyl R_f intermediate 32. Hydroxyl R_f intermediate 32 can be obtained by reacting iodine R_f intermediates with a strong base such as KOH. Hydroxyl R_f intermediate 32 can be reacted with P_2O_5 or $POCl_3$ in the presence of a metal (M) to yield an exemplary phosphate ester or pyrophosphate 34. U.S. Patents 2,559,749 and 2,597,702, herein incorporated by reference, generally describes the conversion of hydroxyl compounds to phosphate esters using P_2O_5 or $POCl_3$ to give partial esters. These reactions can also be carried out in the presence of pyridine as an HCl acceptor. Monoalkyl phosphates can also be prepared by treating phosphorus pentoxide P_2O_5 with excess moles of hydroxyl R_f intermediate 32 followed by hydrolysis of the resulting pyrophosphate. The product can then be isolated as such or precipitated as the ammonium salt by the addition of ammonia to the reaction mixtures. Alternatively, a solution of salts of the mixed mono- and di-esters can be prepared by neutralizing a mixture of the acids with aqueous ammonia and amine or alkaline metal hydroxide.

[0066] Dialkyl phosphates can be prepared as well by a reaction of excess moles of hydroxyl R_f intermediate with phosphorus pentoxide (not shown). Instead of hydrolysis, however the intermediate pyrophosphate can be heated at low pressure. Alternatively, R_f phosphate esters can be prepared and separated by treating hydroxyl R_f intermediate with phosphorus pentoxide, neutralizing the resulting mixed acid phosphate with aqueous

ammonia and amine such as tetraalkyl ammonium base or alkali metal hydroxide to give a solution that can include amine or metal salts of the esters (not shown). Salts of esters can be dissolved in toluene and purged with ammonia to precipitate a mixture of the salts of the corresponding esters. The toluene and unreacted hydroxyl R_f intermediate and by-products such as the corresponding trialkyl phosphate can be removed by filtration, producing compositions having the general formula R_fAOPOR_p , as described in U.S. Patent 4,145,382 herein incorporated by reference. As used in this general formula, the R_f is the R_f group of the present invention, A is a methylene group or other similar spacer group from the phosphate ester and can be present in amounts as high as 3 and as little as none, and R_p is a corresponding salt to the phosphate including hydrogen alkali metal ammonium or substituted ammonium such as ethanol amine.

[0067] These phosphate compositions can be used as disbursing agents in the preparation of polymers or they can be diluted and used to treat substrate materials in aqueous bathes, for example, by ordinary means such as padding, dipping, impregnating, spraying, etc. These compositions can be incorporated into or used to treat such materials as textile fabric, textile yarns, leather, paper, plastic, sheeting, wood, ceramic clays, as well as manufactured articles prepared therefrom such as articles of apparel, wallpaper, paper bags, cardboard boxes, porous earthenware, etc. U.S. Patent 3,112,241 describes methods for treating materials using these phosphate esters and is herein incorporated by reference.

[0068] Referring again to Fig. 3, phosphate esters may also be prepared. According to reaction sequence 40 utilizing R_f epoxide intermediate 42 and/or R_f diol intermediate 44 as generally described in U.S. Patent 3,919,361 and herein incorporated by reference. Intermediates 42 and 44 can be reacted with phosphoric acid to obtain an R_f phosphoric acid ester 46. Phosphoric acid 46 can be dissolved in a solution and applied to a substrate such as paper to increase resistance to environmental materials such as oil and water. Ester 46 can also exist as a salt such as alkyl amines including ethanol amines as described in U.S. Patent 4,145,382 herein incorporated by reference. Ester 46 can be used to treat substrates such as wood pulp products including paper products such as packaging products including food packaging products.

[0069] An embodiment of the present invention includes the R_f group of the present invention incorporated into glycols which can be subsequently incorporated into polymers such as urethanes including polyurethane elastomers, films and coatings. Glycols having the R_f groups of the present invention can be converted to phosphoric acids or phosphate esters of those glycols as well. Referring to Fig. 4, a reaction sequence 50 for the incorporation of the R_f groups of the present invention into glycols is shown. Methods for producing these compositions are described in U.S. Patent 4,898,981, U.S. Patent 4,491,261, U.S. Patent 5,091,550 and U.S. Patent 5,132,445, all of which are herein incorporated by reference. For example and by way of example only, a mercaptan R_f intermediate 52 can be reacted

with a sulfide diol 54 or 2,6 diox-aspiro (3.3) heptane 56 to produce diols 58 and 60, respectively. Diols 58 and 60 can then be used directly or indirectly to make a condensation product 62 such as polyesters, polyureas, polycarbonates, and polyurethanes. This glycol functionality can also be incorporated into block polymers using the glycols having the R_f group of the present invention. U.S. Patent 5,491,261 discloses several other glycols that can benefit from the R_f group of the present invention and is herein incorporated by reference.


[0070] Exemplary diols having R_f groups of the present invention can be converted to phosphoric acid functionality or phosphate esters (not shown). U.S. Patent 5,091,550, 5,132,445, 4,898,981, and 5,491,261 all disclose methods of preparing diols and converting glycols to phosphate esters and are herein incorporated by reference. In an exemplary implementation, the glycols can be converted to phosphoric acid or phosphate esters by reacting the glycols in the presence of phosphoric acid. These compositions can be incorporated into compounds which can act as oil and grease proofing for paper as well as soil release agents for textile fibers.

[0071] Referring to Fig. 5, multiple reactions sequences 70 are shown for the preparation of an acrylic monomer 80 having the R_f group of the present invention. U.S. Patents 3,491,169, 3,282,905, 3,497,575, 3,544,663, 6,566,470, 4,147,851, 4,366,299 and 5,439,998 all relate to the use and preparation of acrylic emulsion polymers that can benefit from the R_f group

of the present invention and are herein incorporated by reference. Thiol R_f intermediates 72, iodine R_f intermediate 74, hydroxyl R_f intermediates 76, and/or acetate R_f intermediates 78 can be converted to acrylate monomer 80 according to the schemes and references described herein.

[0072] Exemplary preparation of 4,5,5,5-Tetrafluoro-4-(trifluoromethyl)pentyl acrylate

[0073] The acrylate 4,5,5,5-Tetrafluoro-4-(trifluoromethyl)pentyl acrylate is prepared from the R_f intermediate 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene in two steps shown below as reaction sequence (8) and (9) respectively.

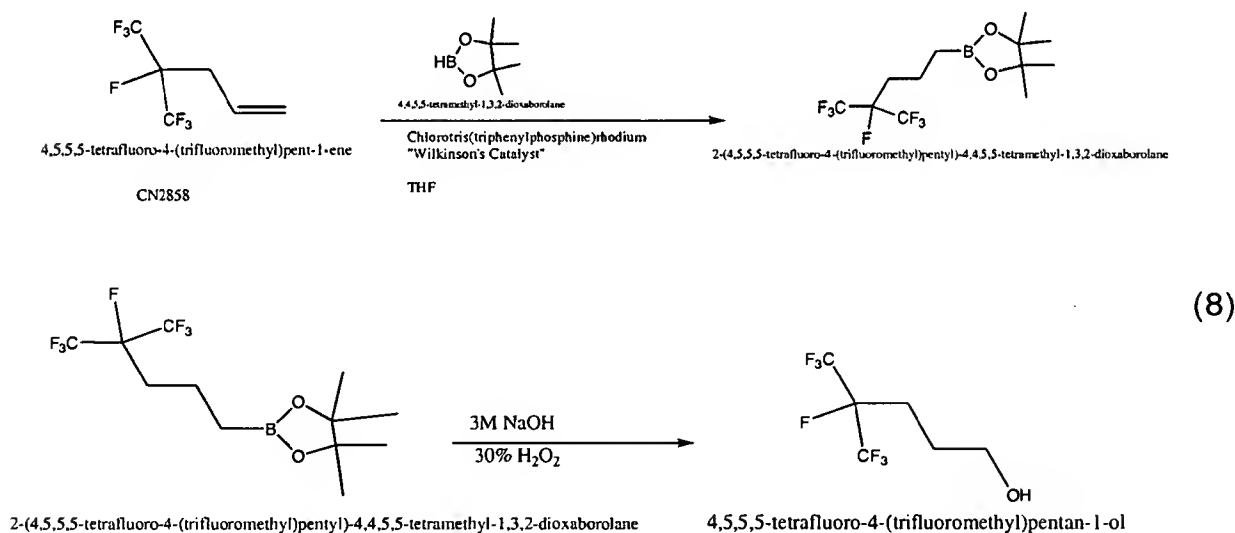


[0074] A 1M solution of 4,4,5,5-tetramethyl-1,3,2-dioxaborolane in tetrahydrofuran (66.1g, 0.075 moles), chlorotris(triphenylphosphine)rhodium

(0.37g), and Tetrahydrofuran (158.8g) is placed in a 500mL three-neck round bottom flask (RBF). 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene (18.243, 0.087 moles) is added to reaction mixture at room temperature over a 15 minute period. Reaction is carried out for 72 hours and is monitored by gas chromatography until which time the 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene is substantially consumed (See Table 1 below for monitoring of reaction).

Table 1: Formation of Borate Ester Reaction Monitoring by Gas Chromatography; All Samples Analyzed on DB WAX Column.			
Sample Number	3.07 minute Area %	9.3 minute Area %	16.8 minute Area %
1	57	29	14
2	22	11	66
3	0	5.4	94.5

Note: 3.07 minute peak = 4,5,5,5-tetrafluoro-4-(trifluoromethyl)pent-1-ene, 9.3 minute peak = 4,4,5,5-tetramethyl-1,3,2-dioxaborolane, 16.8 minute peak = 2-(4,5,5,5-tetrafluoro-4-(trifluoromethyl)pentyl)-4,4,5,5-tetramehtyl-1,3,2-dioxaborolan

[0075] A 3M aqueous solution of Sodium Hydroxide (7.8g) is added to the reaction mixture via the addition funnel over a 15 minute period after which the reaction mixture is chilled to 0°C using an ice bath. Hydrogen peroxide (23.6g, 35% aqueous solution) is added dropwise over a 15 minute period to the reaction mixture. The reaction mixture is then washed in H₂O three times. The organic mixture is transferred into a 100mL 3-neck RBF and distilled to produce an 85% pure (by gas chromatography) 4,5,5,5-Tetrafluoro-4-(trifluoromethyl)pentan-1-ol having a DB Wax elution time of 19.7 minutes.

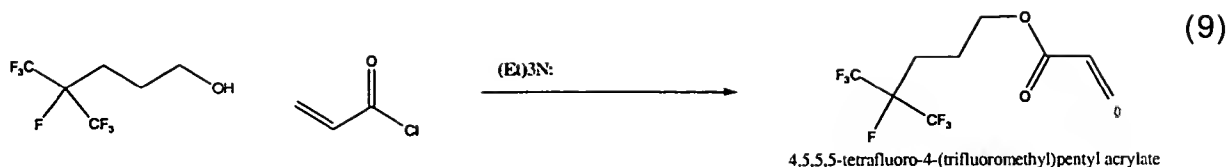

[0076] The 4,5,5,5-Tetrafluoro-4-(trifluoromethyl)pentan-1-ol (2.59g, 0.011moles) and triethylamine (1.3g, 0.013 moles) are added to a 15mL three-neck RBF. The RBF contents are chilled to 0°C using ice water bath and acryloyl chloride (1.38g, 0.015 moles) is added dropwise using an addition funnel to the RBF over a 15 minute period. After a 1 hour hold period, 10 mL H₂O is added and two phases were observed. Water is decanted off the reaction mixture and organic phase is dried over MgSO₄. Organic phase is analyzed by GC wherein a peak was observed at 16.1 minutes on DB Wax Column. GC/MS confirm that the new peak has a mass of 283.

[0077] For example and by way of example only, the R_f group of the present invention can be incorporated into a monomer as described in U.S. Patent 6,566,470 represented as R_f-W-X-C(=O)-C(R¹)=CH₂ with the R_f group as described above, W can be an alkylene with 1 to 15 carbons, hydroxyalkylene with 3 to 15 carbons, -(C_nH_{2n})(OC_mH_{2m})_q-, -SO₂NR²-(C_nH_{2n})- or -CONR²-(C_nH_{2n})-, with n is 1 to 12, m is 2 to 4, q is 1 to 10 and R¹ is an alkyl group with 1 to 4 carbon atoms, X can be O, S and/or N(R²), where R² is as R¹ as defined above. This monomer can be incorporated with other monomers and then incorporated into the

construction of paper materials or used to treat paper materials. These polymeric solutions can be diluted to a percentage aqueous or non-aqueous solution and then applied to substrates to be treated such as paper plates.

[0078] Monomers having the R_f group of the present invention can also be incorporated into copolymers with comonomers such as the dialkyl amino alkyl acrylate or methacrylate or acrylamide or methacrylamide monomer and its amine salt quaternary ammonium or amine oxide form as described in U.S. Patent 4,147,851, herein incorporated by reference. The general formula for these R_f acrylates can be $R_fqO_2CC(R)=CH_2$ wherein R is H or CH_3 , q is an alkylene of 1 to 15 carbon atoms, hydroxyalkylene of 3 to 15 carbon atoms, or $C_nH_{2n}(OC_qH_{2q})_m-$, $-SO_2NR^1(C_nH_{2n})-$, or $-CONR^1(C_nH_{2n})-$, n is 1 to 15, q is 2 to 4 and m is 1 to 15. Comonomers forming a copolymer with acrylates having the R_f group described above include those having amine functionality. These copolymers can be diluted in a solution and applied or incorporated directly into or on substrates to be treated such as paper.

[0079] R_f groups of the present invention can also be incorporated into acrylate polymers or other acrylate monomers consistent with those described in U.S. Patent 4,366,299, herein incorporated by reference. These compositions can be incorporated into paper products or applied thereon.

[0080] Acrylics having R_f groups of the present invention can be applied to finished carpet or incorporated into the finished carpet fiber before it is woven into carpet. Acrylics having R_f groups of the present invention can be applied to carpet by a normal textile finishing process known as padding, in which the carpet is passed through a bath containing latex, water and other minor additives such as non-rewetting surfaces. The carpet can then be passed through nip rollers to control the rate of the add-on before being dried in a tenter frame. The acrylics of the present invention may also be incorporated into the fiber by reacting the fiber with isocyanates having the R_f group of the present invention.

[0081] The R_f groups of the present invention can also be incorporated into materials used to treat calcitic and/or siliceous particulate materials. The R_f groups of the present invention can be incorporated as a monomer into a copolymer where the copolymer can either be part of a formulation to treat these materials or used by itself to treat these materials as described in U.S. Patent 6,383,569 herein incorporate by reference. The monomer can have the general formula $R_f\text{-Q-A-C(O)-C(R)=CH}_2$ wherein R_f is described above, R is H or CH_3 , A is O, S, or N(R') , wherein R' is H or an alkyl of from 1 to 4 carbon atoms, Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $\text{--(C}_n\text{H}_{2n}\text{)(OC}_q\text{H}_{2q}\text{)}_m\text{--}$, $\text{--SO}_2\text{-NR' (C}_n\text{H}_{2n}\text{)--}$, or $\text{--CONR' (C}_n\text{H}_{2n}\text{)--}$, wherein R' is H or an alkyl of 1 to 4 carbon atoms, n is 1 to 15, q is 2 to 4, and m is 1 to 15.

[0082] Once these compositions and mixtures contain the R_f group of the present invention, they can be used to treat hard surfaces including construction materials such as brick, stone, wood, concrete, ceramics, tile, glass, stucco, gypsum, drywall, particle board and chipboard. As stated above, they can be used alone or as in combination with penetration assistance such as non-ionic surfactants. These compositions can be applied to the surface of calcitic and/or siliceous architectural construction material by any known method, for example, by soaking, impregnation, emersion, brushing, rolling, or spraying. Compositions including the R_f groups of the present invention can be applied to the surface to be protected by spraying. Suitable spraying equipment is commercially available. Spraying with a compressed air sprayer is the preferred method of application to the particular material. U.S. Patents 6,197,382 and 5,674,961 also describes methods for applying and using polymer solutions and are herein incorporated by reference.

[0083] In an exemplary process of producing solutions having components with R_f groups according to the present invention, an R_f group may be attached to a methyl-epoxide group and the epoxide condensed with a monocarboxylic alkenoic acid to prepare an unsaturated ester (not shown). Exemplary methods for producing these kinds of unsaturated esters are described in U.S. Patent 5,798,415 herein incorporated by reference. Additional esters may be prepared according to U.S. Patent 4,478,975 herein incorporated by reference. Components of these solutions can also

include dimethyl amino ethyl methacrylate and these components can be applied in organic and inorganic solvents, as described in U.S. Patent 6,120,892 herein incorporated by reference. R_f group polymers and copolymers can also be combined with monomers to produce copolymers or in solutions with amido and sulfur monomers represented by U.S. Patent 5,629,372 herein incorporated by reference.

[0084] Amine R_f intermediates can also be reacted with tetrachlorophthalic anhydride using U.S. Patent 4,043,923 as an exemplary reaction scheme, U.S. Patent 4,043,923 is herein incorporated by reference (not shown). The reaction product can be mixed with a carpet cleaning solution to provide soil repellency.

[0085] The R_f group of the present invention may also be incorporated into urethanes. Referring to Fig. 6 a reaction sequence 90 is shown for the preparation of urethanes including the R_f group of the present invention. A hydroxyl R_f intermediate 92 can be combined with hexamethylene diisocyanate polymers (DESMODUR N-100) 94 following the general reaction sequence described in U.S. Patent 5,827,919 herein incorporated by reference to produce urethane 96. Another method for preparing the urethanes of the present invention includes reacting a mercaptan R_f intermediate with epichlorohydrin to produce a "twin tailed" which can be reacted with diisocyanate and/or a urethane prepolymer as described in U.S. patent 4,113,748 herein incorporated by reference (not shown). The

urethanes having the R_f group can then be incorporated as an additive to compositions such as latex paint. U.S. Patent 5,827,919 described methods for utilizing these urethanes and is herein incorporated by reference. Urethanes and polyurethanes can be used to treat substrates such as carpet, drapery, upholstery, automotive and awning fabrics, and rainwear.

[0086] The R_f group can also be complexed as an acid with amine and quaternary ammonium polymers as described in U.S. Patent 6,486,245 herein incorporated by reference (not shown).

[0087] In compliance with the statute, the invention has been described in language more or less specific as to structural and methodical features. It is to be understood, however, that the invention is not limited to the specific features shown and described, since the means herein disclosed comprise preferred forms of putting the invention into effect.

[0088] Aspects of the Invention.

[0089] 1. R_f groups having at least two terminal $-CF_3$ groups with at least half of the fluorine content of the R_f group being provided by the $-CF_3$ groups.

[0090] 2. The R_f groups of 1 incorporated into polymers, urethanes, acrylate polymers, acrylate monomers, glycols, phosphate esters, metal complexes, and/or fluorosurfactant compositions.

[0091] 3. The compositions of 2 used as disbursing agents; treatments for substrate materials such as textile fabric, textile yarns, leather, paper, plastic, sheeting, wood, ceramic clays, as well as articles of apparel, wallpaper, paper bags, cardboard boxes, porous earthenware, construction materials such as brick, stone, wood, concrete, ceramics, tile, glass, stucco, gypsum, drywall, particle board and chipboard, and substrates such as carpet, drapery, upholstery, automotive and awning fabrics, and rainwear.

[0092] ABSTRACT OF THE DISCLOSURE

[0093] The present invention provides R_f groups can have at least two terminal $-CF_3$ groups with at least half of the fluorine content of the R_f group provided by the $-CF_3$ groups. An exemplary general structure for the R_f group includes $(CF_3)_n(CF)_{(3-n)}(CF_2)_m$, with n between 1 and 3 and m between 0 and 6. These R_f groups can be incorporated compositions such as polymers, urethanes, acrylate polymers, acrylate monomers, glycols, phosphate esters, metal complexes, and fluorosurfactants. These compositions can be used as disbursing agents, to treat substrate materials such as textile fabric, textile yarns, leather, paper, plastic, sheeting, wood, ceramic clays, as well as articles of apparel, wallpaper, paper bags, cardboard boxes, porous earthenware, construction materials such as brick, stone, wood, concrete, ceramics, tile, glass, stucco, gypsum, drywall, particle board and chipboard, and substrates such as carpet, drapery, upholstery, automotive and awning fabrics, and rainwear.

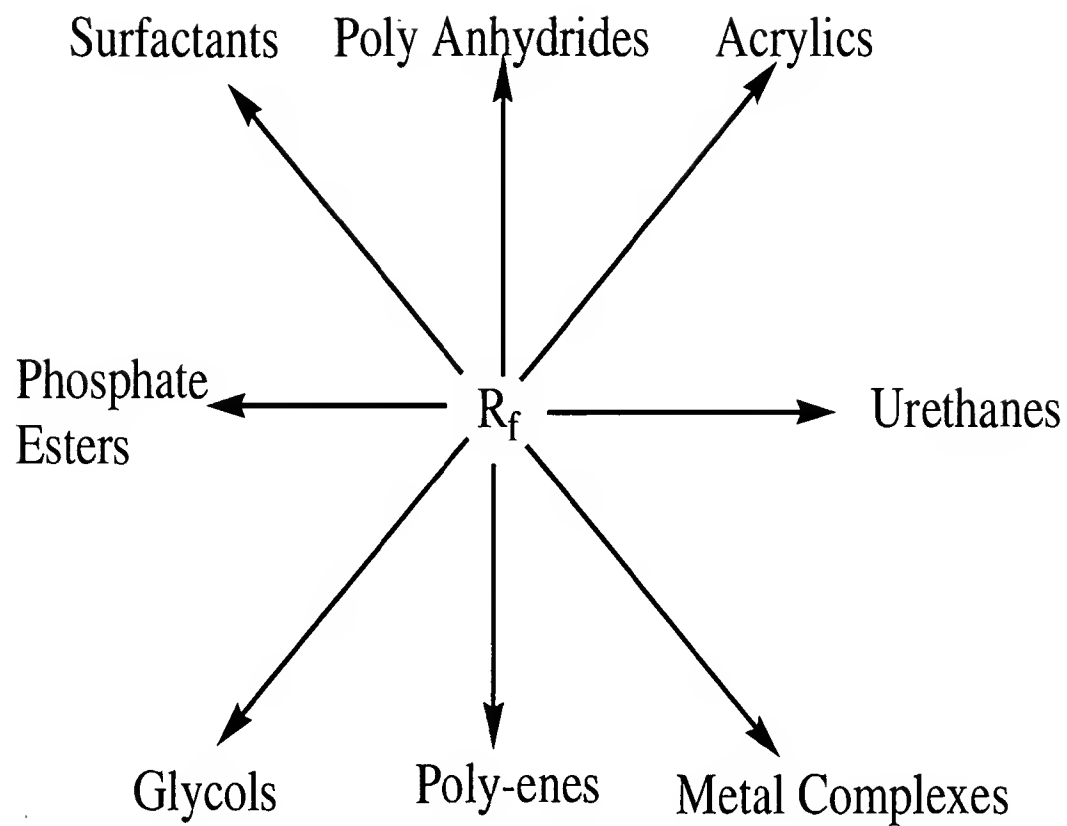


Figure 1

R_f —Metal Complexes

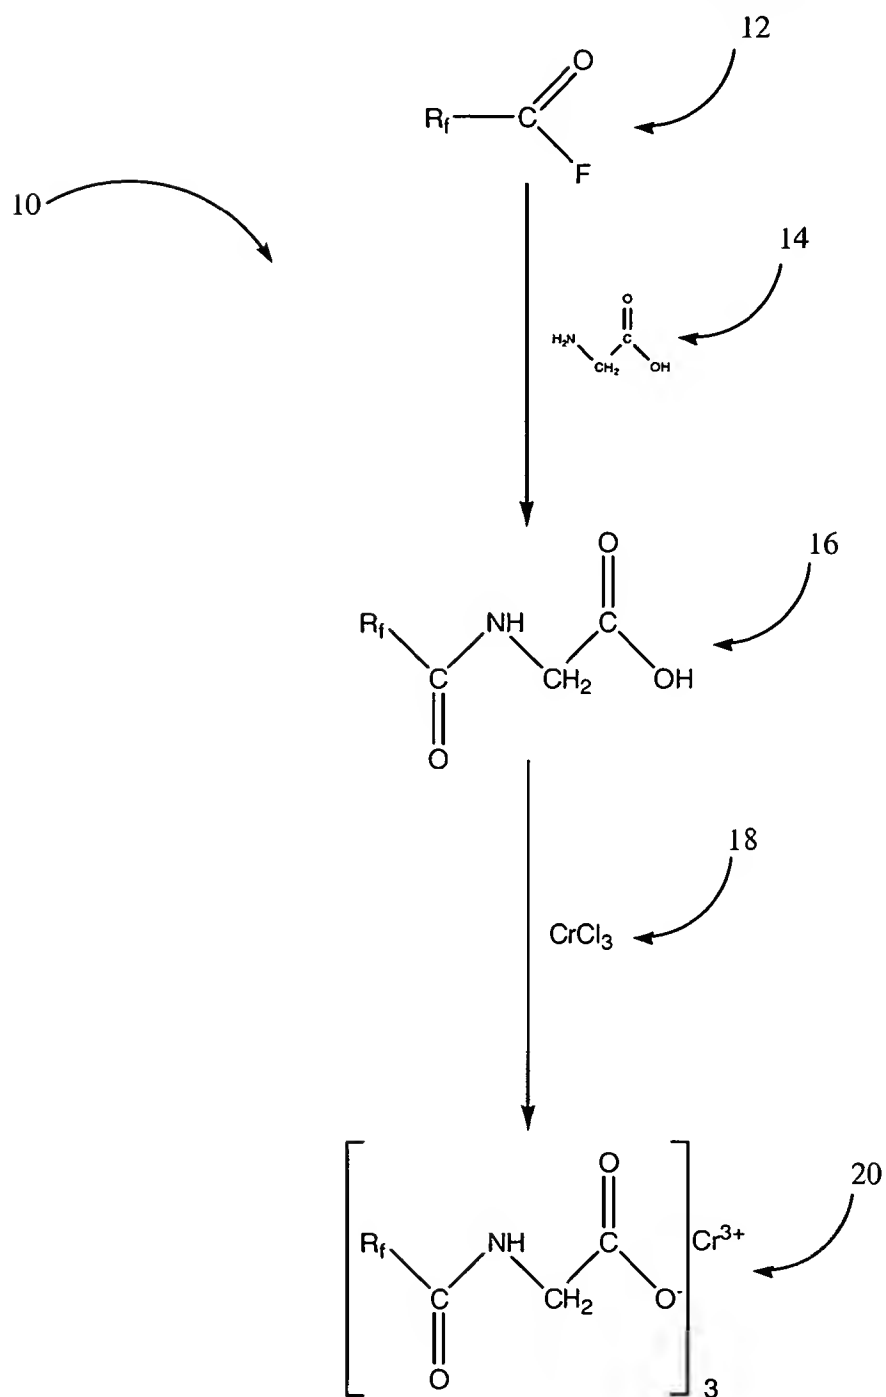


Figure 2

R_f —Phosphates

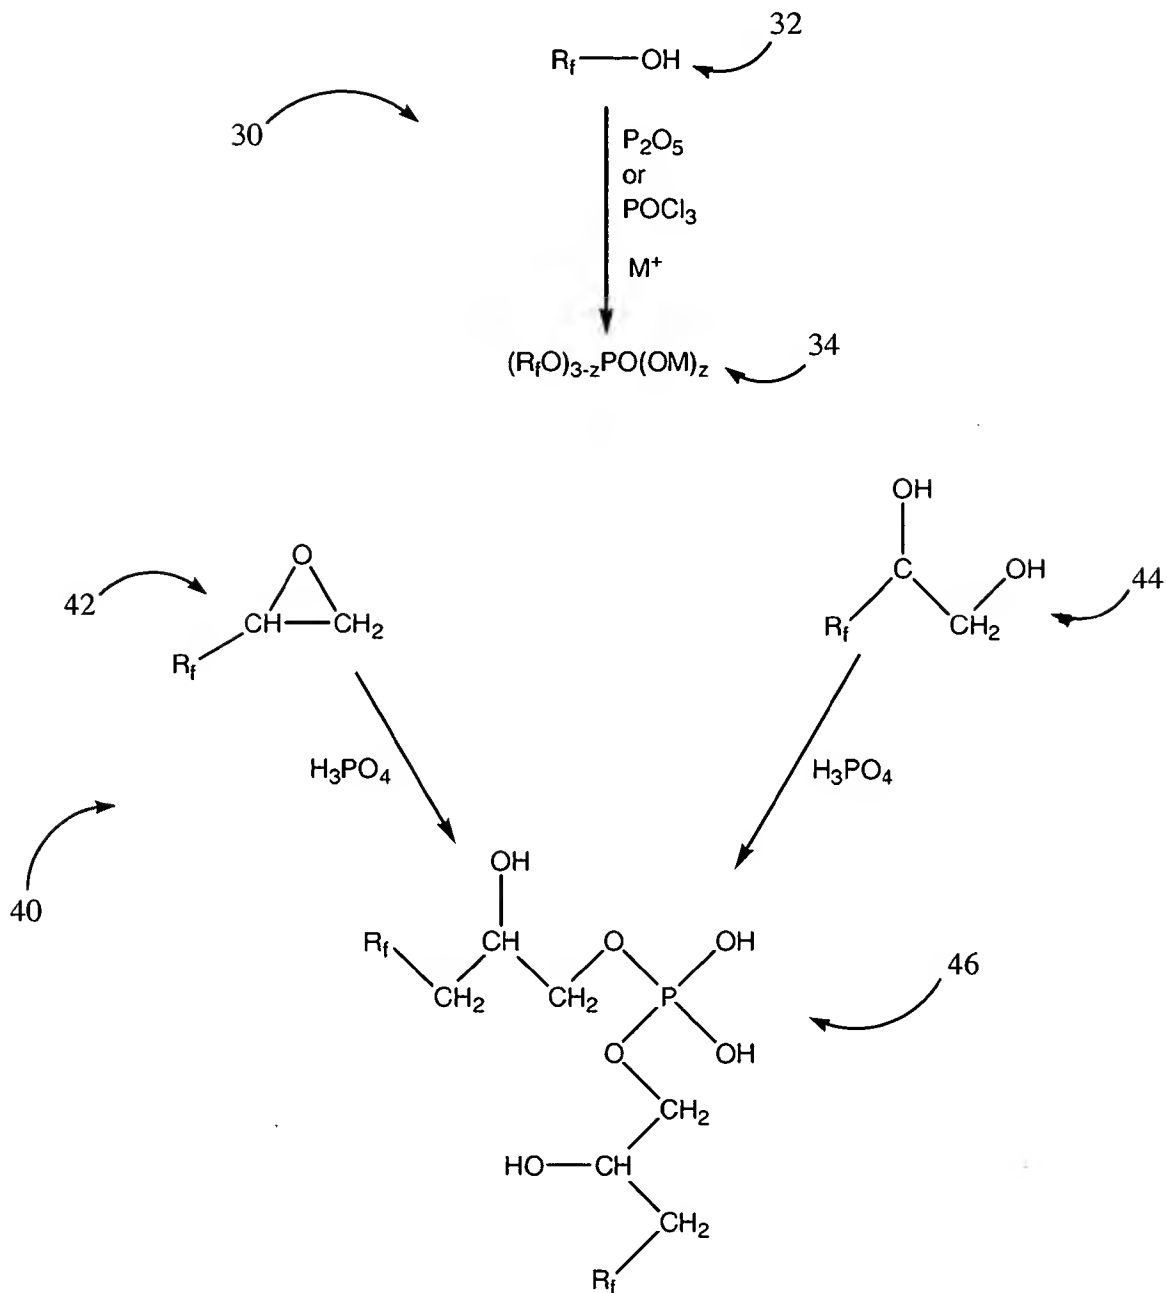


Figure 3

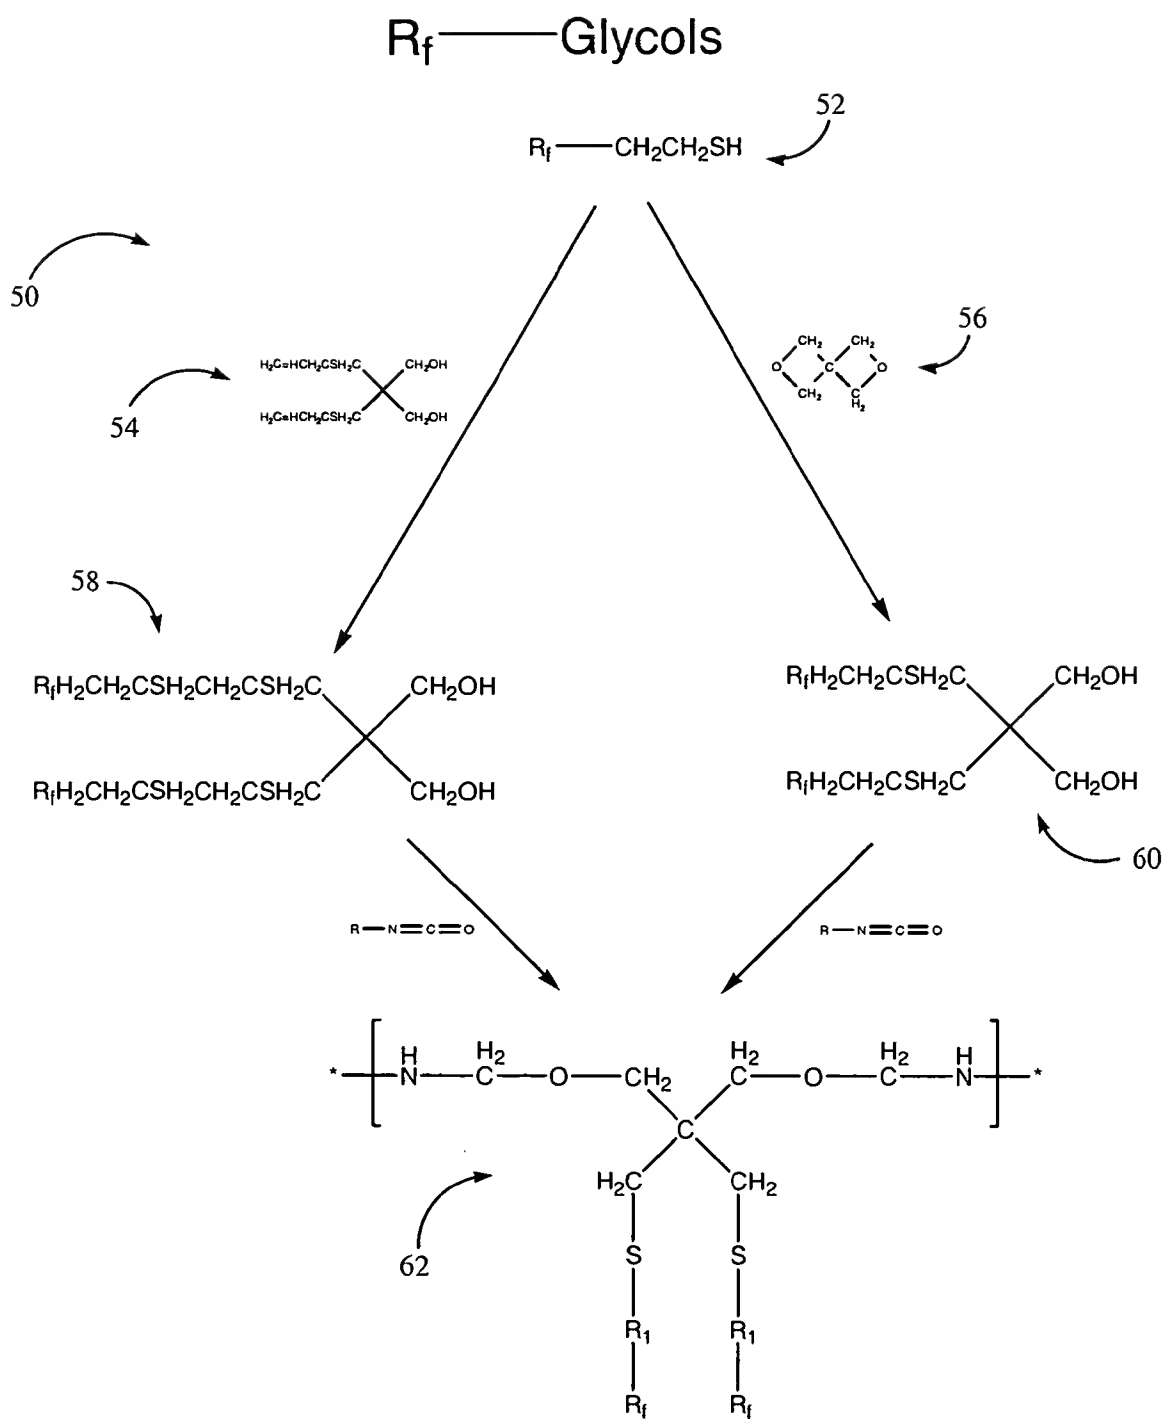


Figure 4

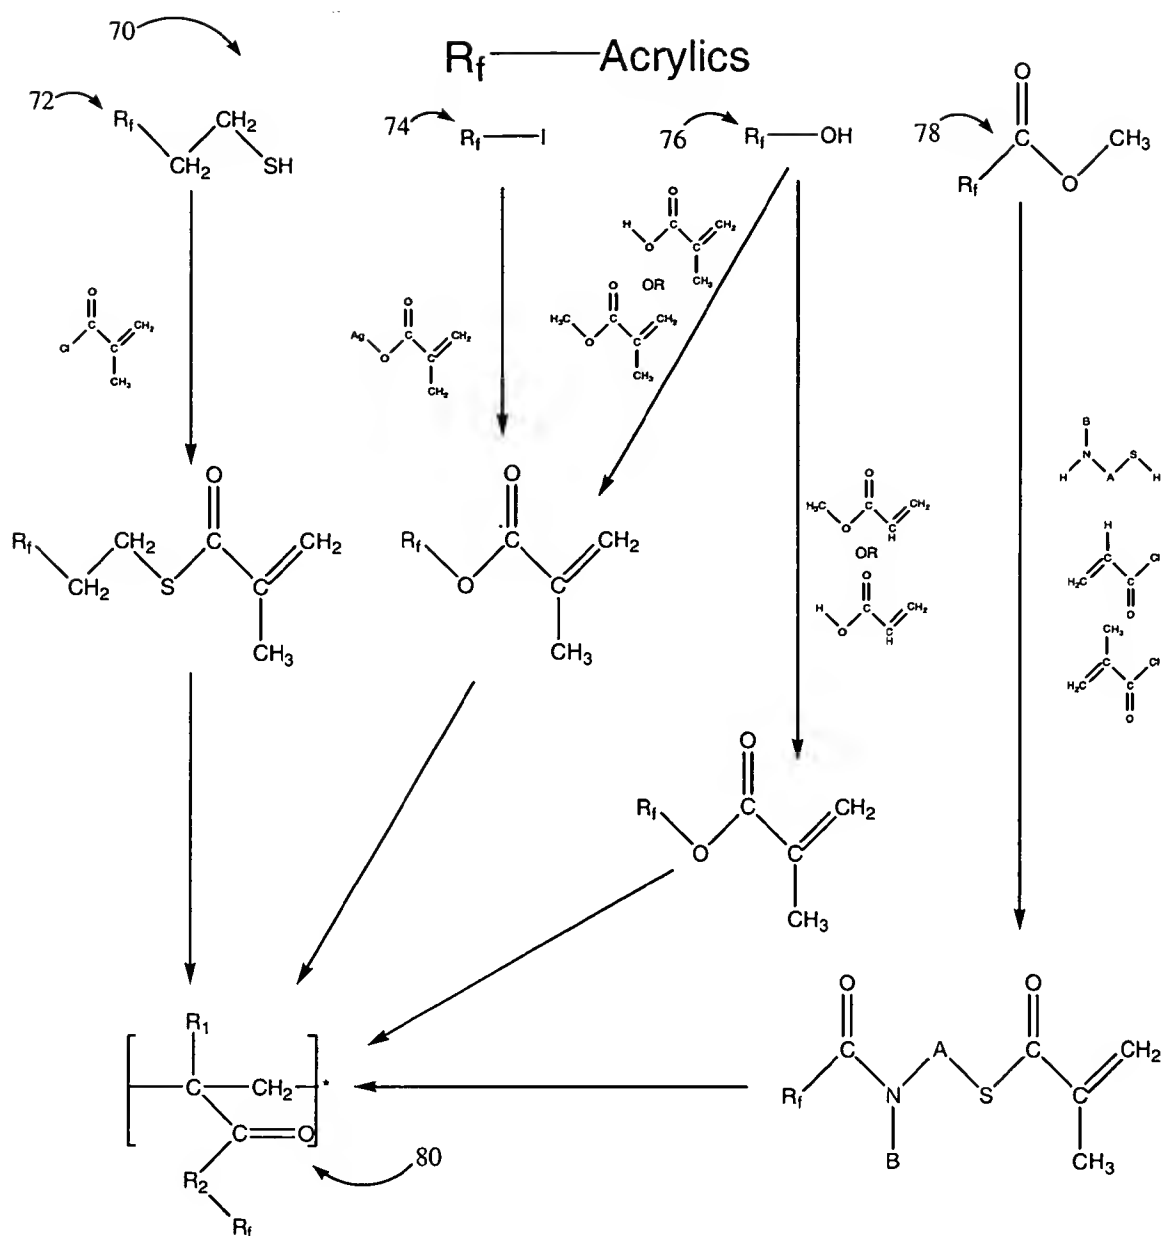


Figure 5

R_f —Urethanes

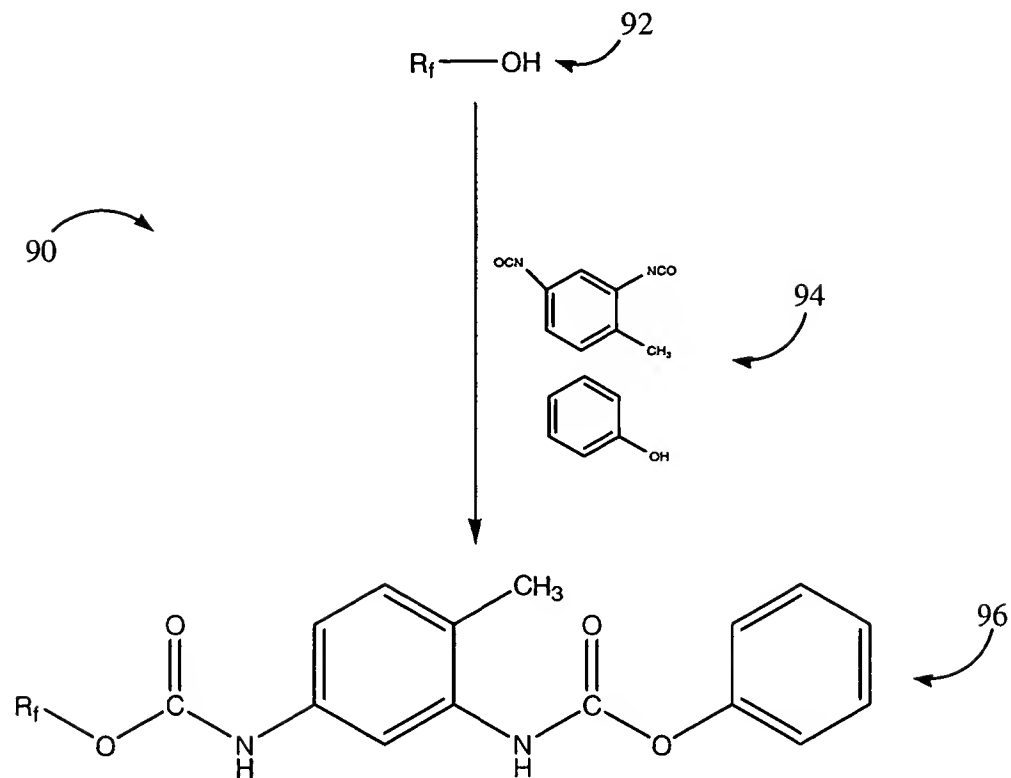


Figure 6